



Advanex Americas, Inc.

5780 Cerritos Ave
 Cypress
 California
 90630
 USA
 714.995.4519
 714.995.7294
 insidesales@advanexusa.com

Fax:
 Email:

Input Data		
Spring Details		
Spring Type	Round Wire Compression	
Design Standard	EN 13906-1: 2002	
Tolerance Standard	EN 15800:2008	
Material Information		
Material - ASTM A228 (Music Wire)		
Young's Modulus	206000	MPa
Rigidity Modulus	81500	MPa
Density	0.00000785	kg/mm ³
Unprestressed Range	0-45	%
Prestressed Range	45-56	%
Design Information		
End Type	Closed & Ground	
Dead Coils	2.00	
Tip Thickness	50.00	%
End Fixation		
Wire Diameter	0.900	mm
Outside Diameter	8.30	mm
Total Coils	17.00	
Spring Rate	1.10	N/mm
Free Length	50.80	mm

Calculated Data		
Solid Length	15.30	mm
Solid Length (Max)	15.55	mm
Solid Load	39.04	N
Solid Stress	1009.1	MPa
OD Expansion at solid	0.110	mm
Stress Factor	1.17	
Active Coils	15.00	
Spring Index	8.22	
Helix Angle	8.00	Deg
Buckling Possible	50.80	mm
Buckling Definite	50.80	mm
Spring Pitch	3.27	mm
Inside Diameter	6.50	mm
Mean Coil Dia.	7.40	mm
Outside Diameter	8.30	mm
Wire Length	398.67	mm
Weight	0.00199	kg
Natural Frequency	23839	RPM

Operating Data		
	Operating Positions	
	1	2
Length (mm)	16.00	
Load (N)	38.27	
Deflection (mm)	34.80	
Stress (MPa)	989	0
Stress % Solid	98	0
O.D. Expansion (mm)	0.108	



Advanex Americas, Inc.

5780 Cerritos Ave

Cypress

California

90630

USA

714.995.4519

714.995.7294


insidesales@advanexusa.com

Fax:

Email:

Spring Tolerances					
EN 15800:2008					
	Value		Grade 1	Grade 2	Grade 3
Free Length	50.80	±	0.877	1.39	2.23
Outside Diameter	8.30	±	0.150	0.300	0.600
Spring Rate	1.10	±			
Squareness			1.60	2.54	4.06
Parallelism			0.125	0.249	0.498
Working Load 1	38.27	±	1.33	2.11	3.37
Working Load 2		±	0.965	1.53	2.45

Spring Drawing

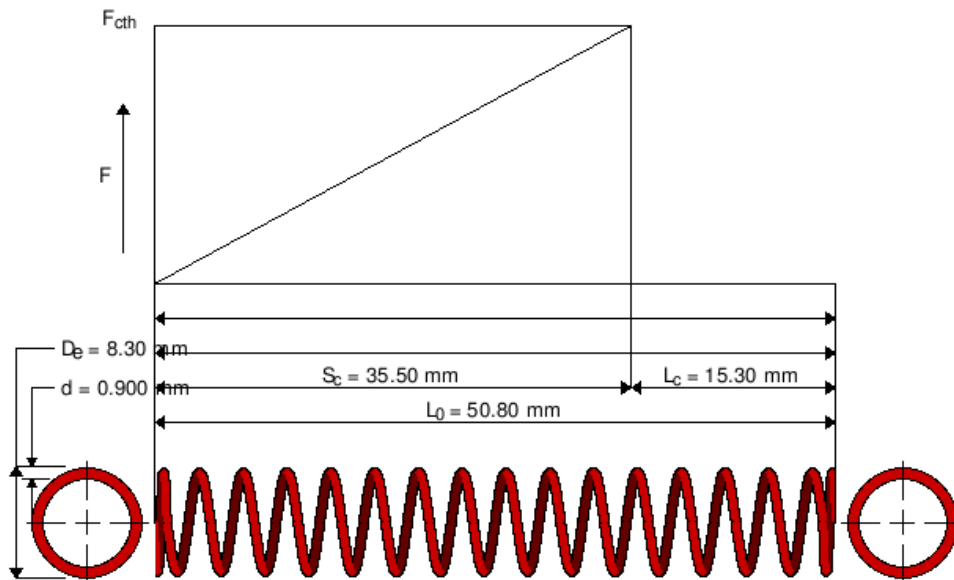



Advanex Americas, Inc.
5780 Cerritos Ave
Cypress
California
90630
USA
714.995.4519
714.995.7294
insidesales@advanexusa.com

Load / Length Drawing

